


SR type seal

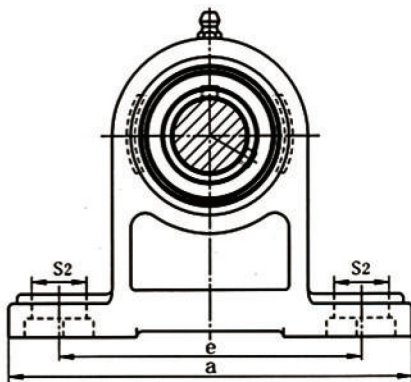

SRL type seal

带座轴承代号 轴径 外形尺寸 (英寸) 或 (毫米) 螺栓 轴承代号 座代号 重量
 Bearing Unit Shaft Dia Dimensions(in)or(mm) Bearing Housing Weight

No.	d	h	a	e	b	S2	S1	g	w	Bi	n	No.	No.
	(in.) (mm)											(mm)(in.)	(kg)
UCPH201	12	2 ³ / ₄	5	3 ³ / ₄	1 ⁹ / ₁₆	3/4	1/2	35/64	3 ³¹ / ₃₂	1.2205	0.5000	UC 201	
201-8	1/2	70	127	95	40	19	13	15	101	31.0	12.7	M10 3/8	PH201 0.96
UCPH202	15	2 ³ / ₄	5	3 ³ / ₄	1 ⁹ / ₁₆	3/4	1/2	35/64	3 ³¹ / ₃₂	1.2205	0.5000	UC 202	
202-10	5/8	70	127	95	40	19	13	15	101	31.0	12.7	M10 3/8	PH202 0.96
UCPH203	17	2 ³ / ₄	5	3 ³ / ₄	1 ⁹ / ₁₆	3/4	1/2	35/64	3 ³¹ / ₃₂	1.2205	0.5000	UC 203	
203-11	11/16	70	127	95	40	19	13	15	101	31.0	12.7	M10 3/8	PH203 0.96
UCPH204-12	6/4	2 ³ / ₄	5	3 ³ / ₄	1 ⁹ / ₁₆	3/4	1/2	35/64	3 ³¹ / ₃₂	1.2205	0.5000	UC 204-12	
204	20	70	127	95	40	19	13	15	101	31.0	12.7	M10 3/8	PH204 0.96
UCPH205-14	7/8											UC 205-14	
205-15	15/16	3 ⁵ / ₃₂	5 1/2	4 1/8	1 ³¹ / ₃₂	3/4	1/2	5/8	4 1/2	1.3386	0.5630	M10 3/8	PH205 1.2
205	25	80	140	105	50	19	13	16	114	34.1	14.3		
205-16	1											205-16	
UCPH206-18	1 1/8											UC 206-18	
206	30	3 ³⁵ / ₆₄	6 1/2	4 3/4	1 ³¹ / ₃₂	13/16	21/32	23/32	5 1/8	1.5000	0.6260	M14 1/2	PH206 1.6
206-19	13/16	90	165	121	50	21	17	18	130	38.1	15.9		
206-20	1 1/4											206-20	
UCPH207-20	1 1/4											UC 207-20	
207-21	15/16	3 ⁴⁷ / ₆₄	6 ⁹ / ₁₆	5	2 ³ / ₈	13/16	21/32	23/32	5 1/2	1.6890	0.6890	M14 1/2	PH207 2.0
207-22	13/8												
207	35	95	167	127	60	21	17	18	140	42.9	17.5		
207-23	17/16											207-23	
UCPH208-24	1 1/2											UC 208-24	
208-25	19/16	3 ¹⁵ / ₁₆	7 1/4	5 ¹³ / ₃₂	2 ³ / ₄	13/16	21/32	25/32	5 ² / ₃₂	1.9370	0.7480	M14 1/2	PH208 2.7
208	40	100	184	137	70	21	17	20	150	49.2	19.0		
UCPH209-26	1 5/8											UC 209-26	
209-27	1 11/16	4 ⁹ / ₆₄	7 ¹⁵ / ₃₂	5 ³ / ₄	2 ³ / ₄	13/16	21/32	25/32	6 ⁷ / ₃₂	1.9370	0.7480	M14 1/2	PH209 3.0
209-28	1 3/4	105	190	146	70	21	17	20	158	49.2	19.0		
209	45											209	
UCPH210-30	1 7/8											UC 210-30	
210-31	1 15/16	4 ²¹ / ₆₄	8 1/8	6 1/4	2 ³ / ₄	7/8	25/32	7/8	6 1/2	2.0315	0.7480	M16 5/8	PH210 3.5
210	50	110	206	159	70	22	20	22	165	51.6	19.0		
210-32	2											210-32	